



Product Specification  
Part #: 01-17-1017  
Description: IW, DOUBLE BATTING, PREMIUM

Product Applications:

- Used in applications separating up to 25°F
- Thermal resistance: R- 6
- General applications include: freezer to freezer, freezer to cooler or cooler to cooler
- Other applications possible upon engineering review

Product Design:

- ASTM E-84 class A exterior vinyl
- High tear resistant and puncture resistant 18oz vinyl exterior
- Recycled polyester batting insulation

Product Construction:

- Flexible partitions are 5' wide continuous height panels
- Binding sewn on edges and top of panels
- Impact relief double folded vinyl with Velcro tab to minimize panel separation
- Cut slope on all panels to accommodate roof pitch
- Heavy duty #4 grommets every 12" along the top of panels. Adjustable and replaceable bottom sweep enclosed inside panels on double Velcro
- Valance for bar joist area cut to height, all edges closed with binding, heavy duty #4 grommets every 12" top and bottom
- Approval and installation drawings provided with each order
- Weight – 0.40 lbs/sqft

Available Options:


- Strip doors (ribbed, reinforced, low temperature)
- Mounting angle (galvanized, aluminum)
- Factory cut door openings with grommets every 12" top and sides
- Clear vision panels

Disclaimer: End user is responsible for checking with local fire department and/or insurer prior to installation of curtains to ensure compliance with all fire regulations.




SOFT-WALL & MACHINE PROTECTION SOLUTIONS


Part #: 01-17-1017  
IW, DOUBLE BATTING, PREMIUM

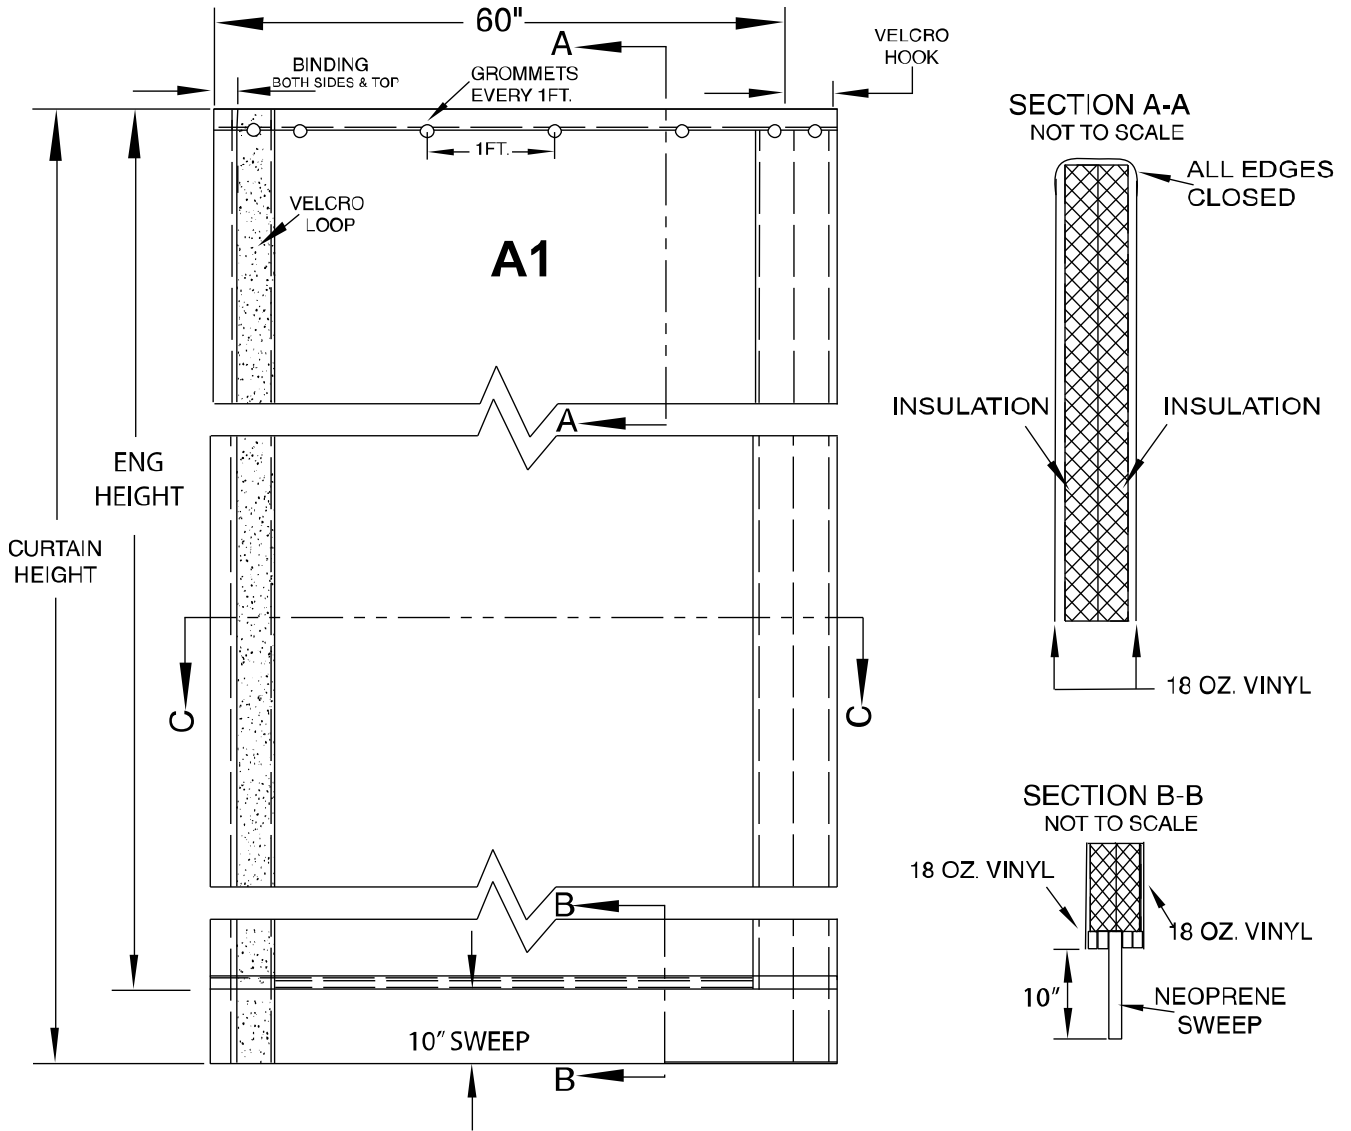

SECTION A-A  
NOT TO SCALE

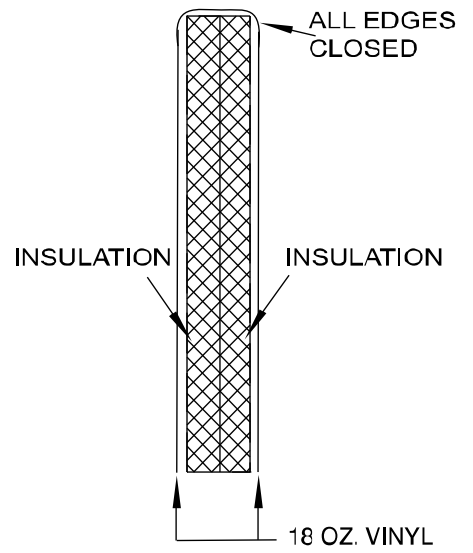

SECTION B-B  
NOT TO SCALE

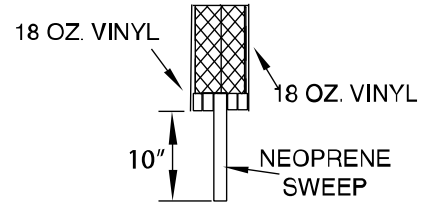

SECTION C-C  
NOT TO SCALE

